


JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

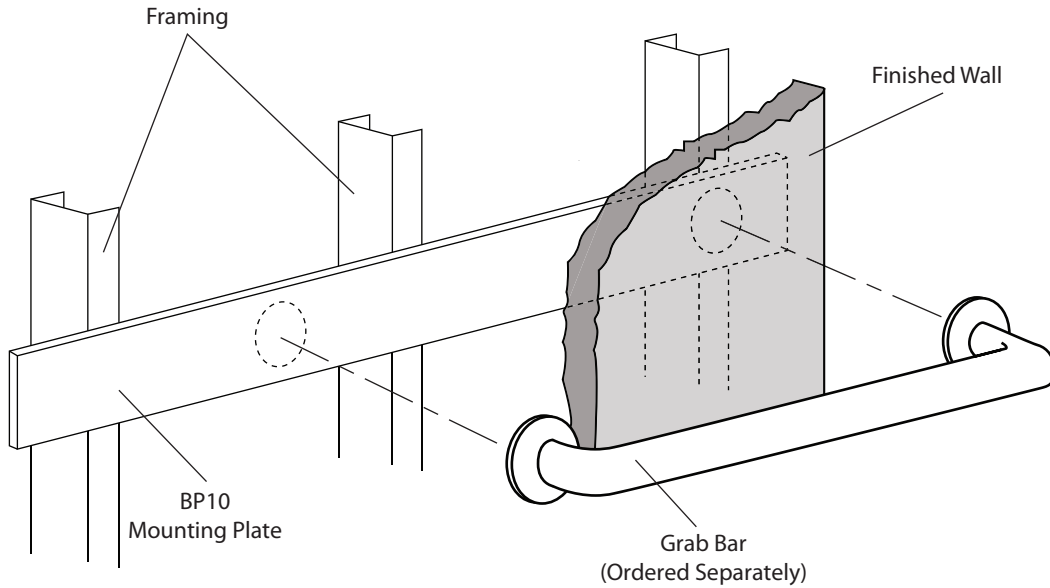

SPECIFICATIONS

BP10: Fabricated of #11 gauge stainless steel. Back plate is drilled and tapped at job site to enable installer to position plate exactly where it will fit the best.

Standard Lengths (Other sizes available upon request): 24", 30", 36", 42", 48"

INSTALLATION

Anchor plate must be properly secured to studs to support maximum load for grab bar or safety railing at the proper height to comply with ADA code.

After wall is finished, flange or concealed mounting plate is to be attached to anchor plate with mounting screws. For plaster or tile walls, mounting screws should be temporarily screwed into anchor plate before application of finished wall.

NOTES