




U649AW

ROLL TOWEL DISPENSER & WASTE RECEPTACLE

Job #:
Item #:
Quantity:

MOUNTING	HANDING	TYPE	SIZE	OTHER

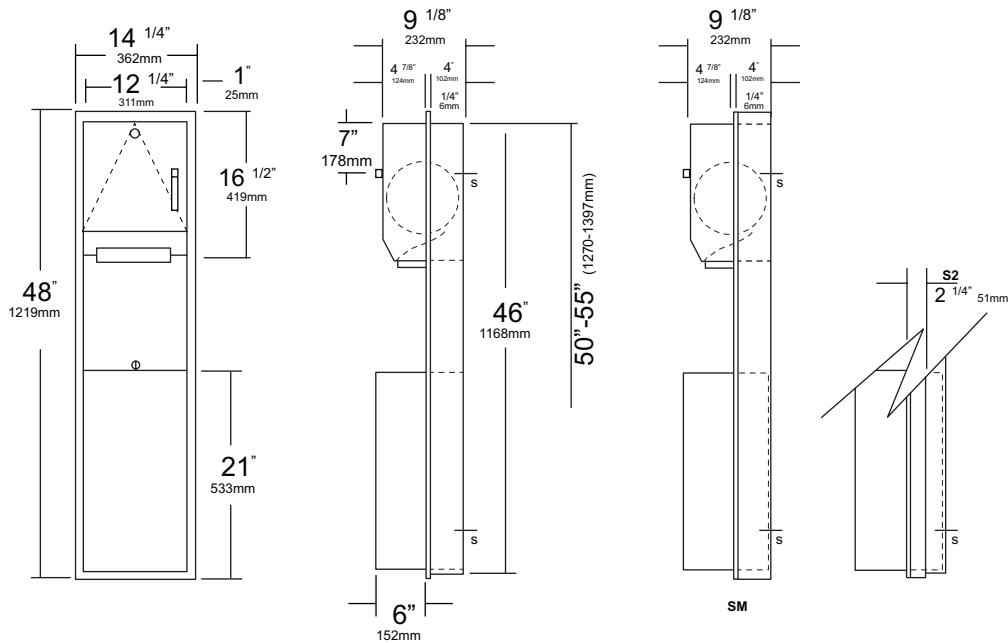

SPECIFICATIONS

Body: Type 304 #22 ga stainless steel, #4 satin finish,

Flange: Type 304 #22 ga stainless steel finished to match cabinet with 1/4" returns, (No miters or welds)

Cabinet Back: Type 304 stainless steel formed for rigidity with multiple welds to cabinet body,

Cabinet Doors: Type 304 #22 ga stainless steel with #4 satin finish, with full length door stop to reduce vandalism

Towel Dispenser: Roll towel mechanism is fabricated of #20 ga steel formed for rigidity, Unit will accommodate one 8" or 9" wide roll with a max o/d, of 7 7/8", Towel length dispensed has three adjustable settings, Lever is activated with one hand and less than 5 lbs of force to activate,

Waste: Type 304 #22 ga stainless steel with all leading edges hemmed, Unit is equipped with wire handle for easy handling,

Hinge: Full length, stainless steel piano type hinge,

Locks: Pin tumbler commercial quality lock,

Collars: Type 304 #22 ga stainless steel, finished to match cabinet. (Semi-recessed and surface mounted)

U649AW: Rec Roll Towel Dispenser and Waste

Overall Size: 14 1/4"W x 48"H x 10 1/4"D
362mm x 1219mm x 260mm

Wall Opening: 12 3/4"Wx46 1/2"Hx 10"D
324mm x 118mm x 254mm

Capacity: 8.5gallons(1.16 cu ft)

***Recommended 600ft roll for best results.**

INSTALLATION

Coordinate installation with architect and contractor to avoid interference with pipes, vents, etc.. Provide a rough wall opening 12 3/4"W x 46 1/2"H, Required wall depth, will depend if full or semi-recessing is required, If collar is required, slide collar over the back before installing into wall, Remove waste from cabinet and mount unit plumb and true in opening with proper fasteners per application. Secure waste in cabinet and load paper towels, Controls and or mechanisms should operate with one hand and 1 force required to activate controls shall be no greater than 5 lbs, (4.27.4)

U649AW-S2: 2" Semi-Rec, collar 8" w/o, 203 mm

U649AW-S4: 4" Semi-Rec, collar, 6" w/o, 152 mm

U649AW-S6: 6" Semi-Rec, collar, 4" w/o, 102 mm

U649AW-SM: Full surface mounted collar.

NOTES