



U4494

Uni-Door Waste Receptacle


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

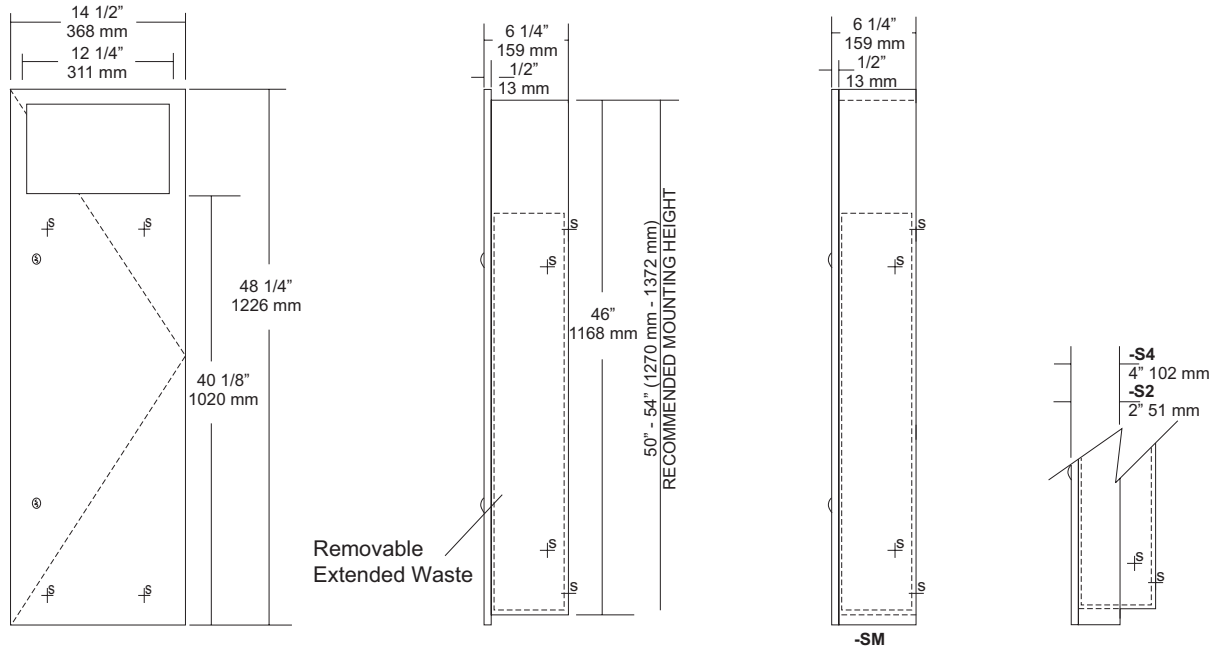

Removable
Extended Waste

-SM

SPECIFICATIONS

- Body:** Fabricated of #22 gauge stainless steel with #4 satin finish on all exposed areas.
- Uni-Door:** Fabricated of #18 gauge, one piece stainless steel secured to body by means of a full length heavy duty stainless steel piano type hinge.
- Flange:** Fabricated of #22 gauge stainless steel finished to match cabinet. One piece construction without miters or welds with 1/4" returns to wall.
- Removable Waste:** Heavy duty pre-plated steel with large service handle for easy servicing.
- Back:** Fabricated of stainless steel formed for rigidity with multiple welds to cabinet.
- Locks:** Pin tumbler commercial quality type, keyed like all other AJW cabinets.
- Collars:** #22 gauge stainless steel sized and finished to match cabinet, surf mount & semi-recessed.
- Overall Size:** 14 1/2"W x 48 1/4"H x 6 1/4"D
368mm x 1225mm x 159mm
- Wall Opening:** 12 3/4"W x 46 1/2"H x 6"D
324mm x 1181mm x 152mm
- U4494-S2:** 2" semi-recessed. Collar with 4" (102mm) wall opening
- U4494-S4:** 4" semi-recessed. Collar with 2" (51mm) wall opening
- U4494-SM:** Surface Mounted
- Capacity:** 10.5 gallons (1.4 cu ft)
- Options:**
- P: Rigid Plastic Waste

INSTALLATION

Coordinate installation with architect and contractor. Provide a wall opening 12 3/4"W x 46 1/2"H. Wall depth will vary will vary if collars are required. Open bottom door and remove waste from cabinet and insert in wall opening. Secure unit with proper fasteners per each application. Make sure unit is plumb. After unit has been secured, place waste back into cabinet and secure door.

NOTES