

date
projectname
attn
from
fax
email
phone

6/12/2019
LINDEN MOB
AMY
Jacqueline Finley
jfinley@pdoor.com
7034612539



U4494

Uni-Door Waste Receptacle


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

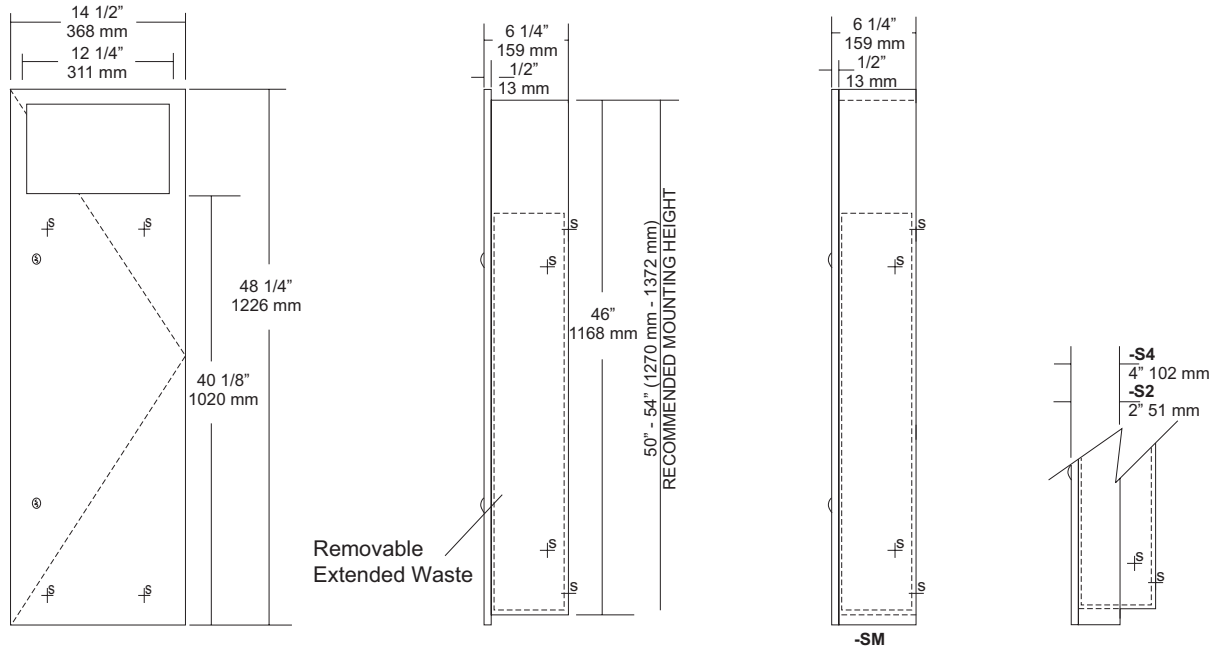

SPECIFICATIONS

Body: Fabricated of #22 gauge stainless steel with #4 satin finish on all exposed areas.

Uni-Door: Fabricated of #18 gauge, one piece stainless steel secured to body by means of a full length heavy duty stainless steel piano type hinge.

Flange: Fabricated of #22 gauge stainless steel finished to match cabinet. One piece construction without miters or welds with 1/4" returns to wall.

Removable Waste: Heavy duty pre-plated steel with large service handle for easy servicing.

Back: Fabricated of stainless steel formed for rigidity with multiple welds to cabinet.

Locks: Pin tumbler commercial quality type, keyed like all other AJW cabinets.

Collars: #22 gauge stainless steel sized and finished to match cabinet, surf mount & semi-recessed.

Overall Size: 14 1/2"W x 48 1/4"H x 6 1/4"D
368mm x 1225mm x 159mm

Wall Opening: 12 3/4"W x 46 1/2"H x 6"D
324mm x 1181mm x 152mm

U4494-S2: 2" semi-recessed. Collar with 4" (102mm) wall opening

U4494-S4: 4" semi-recessed. Collar with 2" (51mm) wall opening

U4494-SM: Surface Mounted

Capacity: 10.5 gallons (1.4 cu ft)

Options:

-P: Rigid Plastic Waste

INSTALLATION

Coordinate installation with architect and contractor. Provide a wall opening 12 3/4"W x 46 1/2"H. Wall depth will vary will vary if collars are required. Open bottom door and remove waste from cabinet and insert in wall opening. Secure unit with proper fasteners per each application. Make sure unit is plumb. After unit has been secured, place waste back into cabinet and secure door.

NOTES