

date
projectname
attn
from
fax
email
phone

3/26/19
Folded towels
at
at
allisontaylor@ruckspecialties.com



U176

Vanity Mounted Towel Dispenser


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

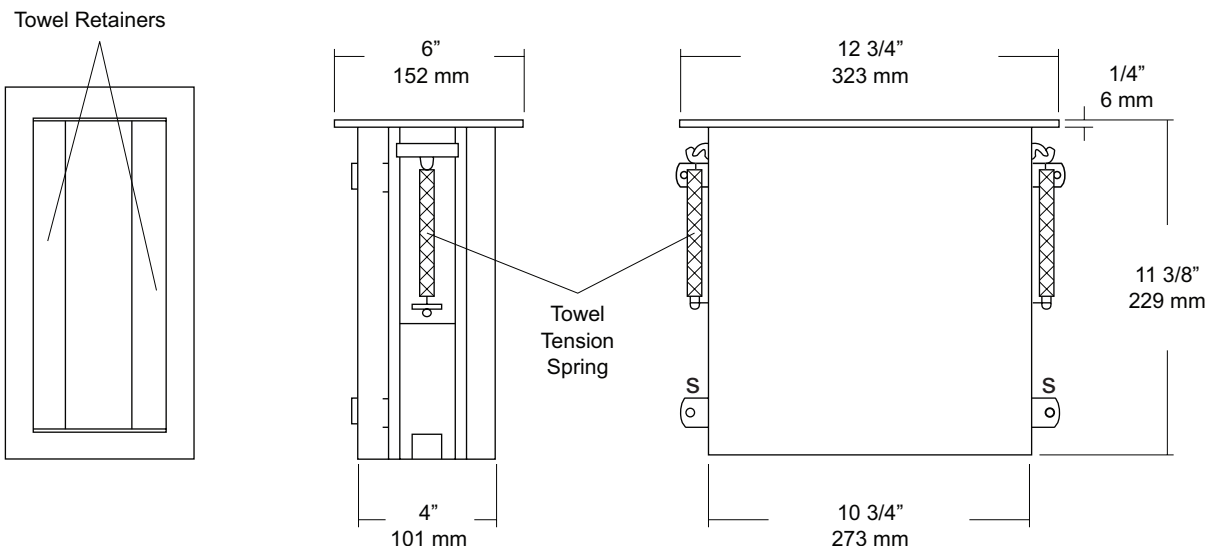

SPECIFICATIONS

Cabinet: Fabricated of #22 gauge stainless steel with a #4 satin finish on all exposed surfaces.

Flange: Fabricated of #22 gauge stainless steel with a #4 satin finish. Returns are 1/4" to countertop for maximum strength.

Dispenser: Towel retainers are fabricated of #22 gauge stainless steel. Dispenser is equipped with a spring loaded towel tray

Capacity: 300 c-fold or 400 multifold

Overall Size: 6"W x 12 3/4"L x 11 3/8"D

152mm x 324mm x 289mm

Vanity Opening: 4 1/2"W x 12 1/4"L

114mm x 311mm

INSTALLATION

Provide a countertop opening 4 1/2"W x 12 1/4"L. Bend mounting tabs in, towards the cabinet and insert into countertop opening. Make sure unit is flush with countertop. Bend back tabs and mount unit at points indicated by "S" on drawing. Coordinate installation with architect or contractor to avoid interference with pipes.

NOTES

Formerly Model #: U976



U181

Folded Towel Dispenser


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

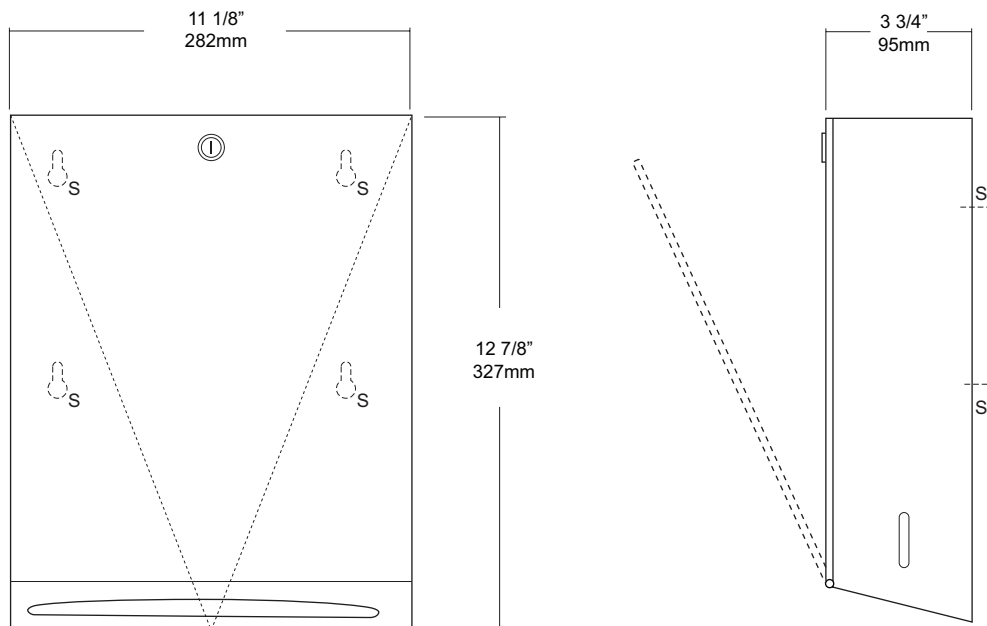

SPECIFICATIONS

Cabinet: Fabricated of heavy gauge steel with a white, powder coated finish. Door is equipped with a keyed lock

Hinges: Full length, heavy duty, stainless steel , piano type hinge. (Welded, no rivets)

Locks: Pin tumbler, commercial quality.

Towel Dispenser: Area is hemmed to prevent towel tearing and injury.

Overall Size: 11 1/8"W x 12 7/8"H x 3 3/4"D

279mm x 327mm x 102mm

Capacity: 400 c-fold or 525 multifold

INSTALLATION

Provide an area on mounting surface at desired or specified location. Open cover and place unit against wall and transfer mounting points after checks out to be level and is at the proper mounting height. Secure unit to surface with proper fasteners, fill cabinet with towels, close cover and remove key.

Recommend towel dispensing area at a height of 40" above finished floor to meet ADA Code.

NOTES



U190

Folded Towel Dispenser



Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

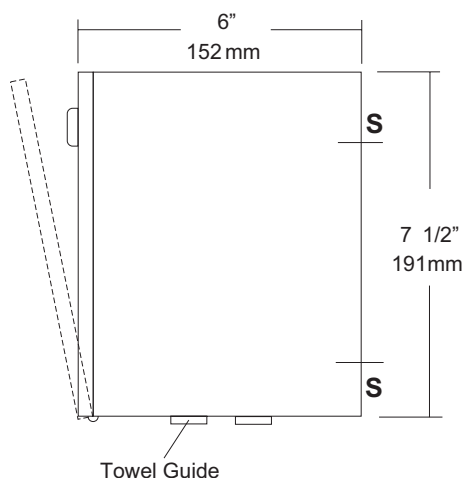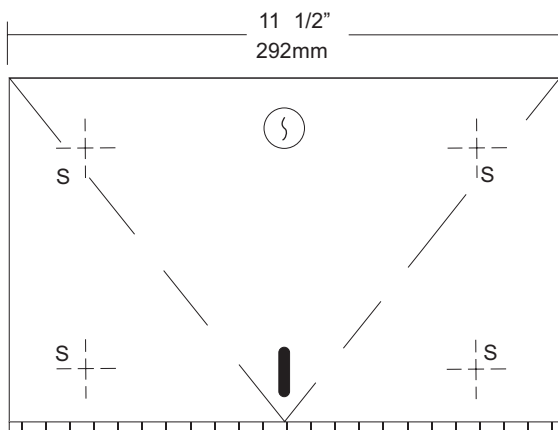

SPECIFICATIONS

Cabinet Body: Fabricated of #22 ga stainless steel with a #4 satin finish.
Back: #22 ga stainless steel with multiple welds to cabinet.
Door: #22 ga stainless steel with 1/4" returns for maximum rigidity. Slot in door provides a visual paper level check at all times.
Hinges: Full length stainless steel piano type hinge. Towel Dispensing Area: Hemmed edges to prevent injury and towel tearing.
Locks: Pin tumbler commercial quality keyed like all other AJW cabinets.
Overall Size: 11 1/2"W x 7 1/2"H x 6"D
292mm x 191mm x 152mm
Capacity: 400 singlefold towels
Options:
-TK: Twist lock in lieu of keyed lock.

INSTALLATION

Provide an area on mounting surface at desired or specified location. Open cover and place unit against wall and transfer mounting points after checks out to be level and is at the proper mounting height. Secure unit to surface with proper fasteners, fill cabinet with towels, close cover and remove key.
 Recommend towel dispensing area at a height of 40" above finished floor to meet ADA Code.

NOTES



U210 Towel & Soap Dispenser Combination Unit


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

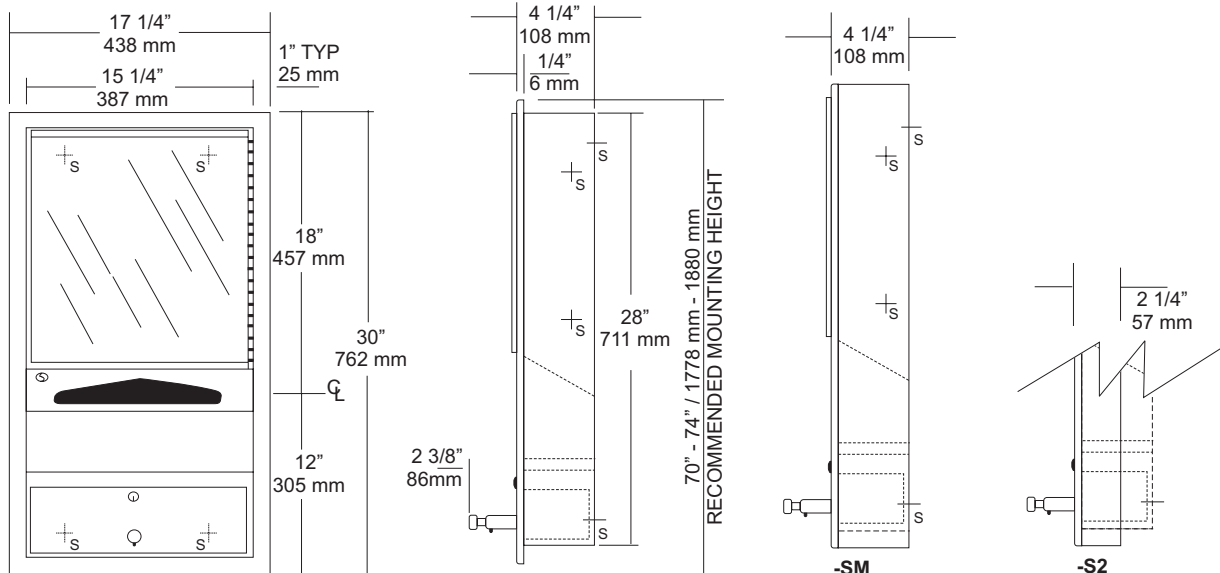

SPECIFICATIONS

Cabinet Body: Fabricated of #22 ga stainless steel with a #4 satin finish.

Flange: Fabricated of #22 ga stainless steel with #4 satin finish. One piece construction without miters or welds, returns are 1/4" to wall for maximum rigidity.

Cabinet Back: Fabricated of stainless steel with multiple welds to cabinet body for maximum rigidity.

Door: 1/4" plate glass with a 15 year warranty against silver spoilage, with top and bottom s/s channel.

Soap Tank: #20 ga stainless steel fully welded construction. Removable for easy servicing and cleaning. All purpose chrome on brass bellows valve is included. Tank capacity is 100 fluid ounces.

Towel Dispenser: Hemmed edges to prevent towel tearing and injury.

Shelf: Fabricated of #22 ga stainless steel #4 satin finish.

Hinges: Full length stainless steel piano type hinge.

Locks: Pin tumbler type, keyed like all other AJW items.

Collars: #22 ga stainless steel finished to match cabinet for semi-recessing or surface mounting.

Overall Size: 17 1/4"W x 30"H x 4 1/4"D

(438mm x 762mm x 108mm)

Wall Opening: 15 3/4"W x 28 1/2"H x 4"D

(400mm x 648mm x 102mm)

Towel Capacity: 600 c-fold or 800 multifold

U210-S2: semi-recessed. 2" collar, with 2" (51mm) wall opening.

U210-SM: Surface mounted collar.

Options:

-R: Refill Indicator

INSTALLATION

Coordinate installation with architect or contractor to avoid interference with pipes, vents etc. Provide a wall opening 15 3/4"W x 28 1/2"H. Depth will depend on mounting style. See specifications. If a collar is required place over back of cabinet before placing into wall opening or mounting to surface. Place unit in wall opening making sure cabinet will be level. Secure with proper fasteners per application. Remove soap tank and fill with proper soap. Secure in cabinet and lock in place. Load the proper paper towels and avoid over filling.

Preventive maintenance: Each soap dispenser should be flushed out aprx. Every 30 days with warm water to avoid valve from clogging with old soap. Do not use abrasive cleaners to clean dispensers or cabinets.

NOTES



U280 Folded Towel Dispenser


Revision 03/12

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

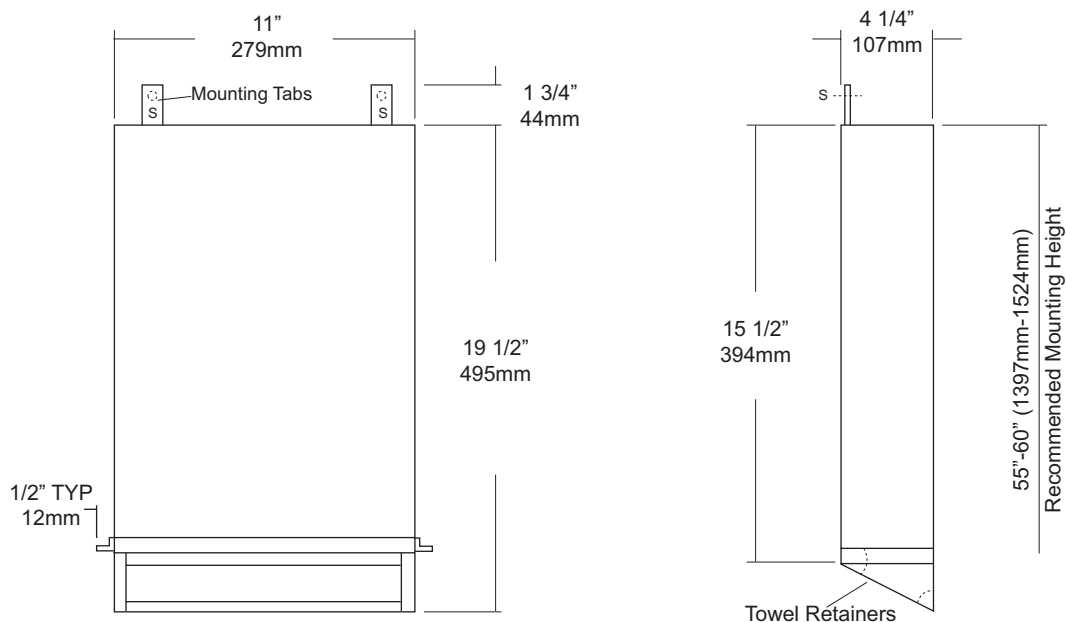

SPECIFICATIONS

Cabinet: Fabricated of #22 ga. stainless steel formed for rigidity with multiple welds to cabinet body. Spring loaded paper towel retainers are permanently attached to cabinet body by means of a full length piano hinge. Dispenser has hemmed edges to prevent towel tearing and injury. All exposed surfaces have a #4 satin finish.

Overall Size: 11"W x 19 1/8"H x 4 1/4"D

(279mm x 495mm x 108mm)

Wall Opening: 11 1/4"W x 19 1/4"H x 4 1/4"D

(279mm x 485mm x 108mm)

Towel Capacity: 600 c-fold or 800 multifold

INSTALLATION

Provide a rough wall opening 11 1/4"W x 19 1/4"H x 4 1/4"D with a minimum recessed depth of 4 1/4". Insert unit into wall opening and secure unit at points indicated on drawing by letter "S". Coordinate installation with architect or contractor to avoid interference with pipes, vents, etc. in wall. Fasteners are not supplied.

NOTES



U374

Paper Cup Dispenser


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

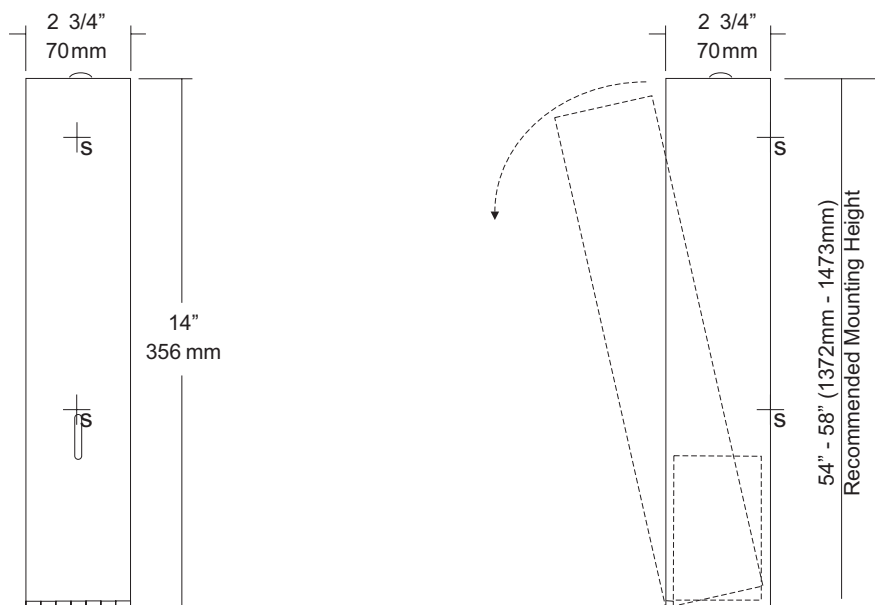

SPECIFICATIONS

Body: Fabricated of #22 gauge stainless steel with a #4 satin finish. Slot in front will allow a constant visual check of the cup capacity.

Back: Fabricated of stainless steel formed for rigidity. Back is secured to body by means of a heavy duty stainless steel piano type hinge.

Dispenser: Dispensing area is hemmed to prevent and cups from hanging up when being dispensed.

Guides: Adjustable guides are fabricated of stainless steel with tabs that allow unit to dispense 3oz to 6oz cups.

Lock: Pin tumbler type lock keyed like all other AJW cabinets.

Overall Size: 2 3/4"W x 14"H x 2 3/4"D

70mm x 356mm x 70mm

Capacity: 150 3oz cups

****Maximum diameter cup at rim is 2 9/16" to assure proper operation.**

INSTALLATION

Open cabinet and place on mounting surface at desired location. Transfer mounting points to surface and drill pilot holes. Secure cabinet with proper fasteners per application. Adjust guides for proper opening per each cup diameter and test for dispensing. Close cabinet door and remove key.

NOTES



U480

Countertop Waste Chute


Revision 03/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

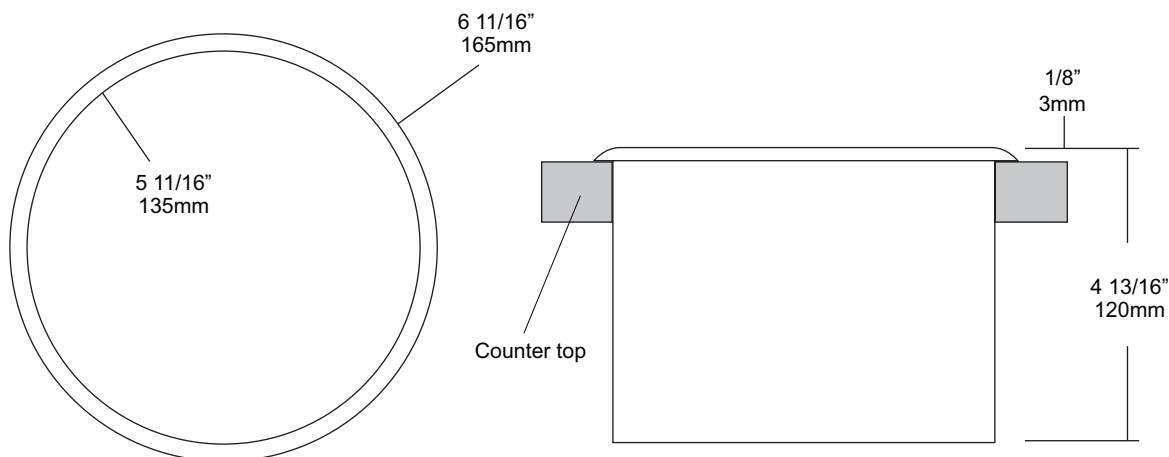

SPECIFICATIONS

Waste Chute: Fabricated of #22 ga stainless steel with a bright polished finish on all exposed surfaces seamless one piece construction.

Overall Size: 6 11/16" OD x 4 13/16"D

169mm x 122mm

Counter top Opening: 5 13/16" diameter

INSTALLATION

Provide an area on counter top at desired or specified location. Coordinate installation with architect contractor to avoid interference with pipes. Cut 5 13/16" diameter opening for chute using proper tools. Fill in the underside of flange and around the area of the cut out counter top with silicone (not provided) and insert into opening. Clean off any excess sealant above and below counter. Waste receptacle is not provided and must be purchased separately.

NOTES