date
projectname
attn
from
fax
email
phone

22/11 Salbokh Compound Project Eng. Pavalos Maifoshis Atlantic Supplies Trading

mohammad@atlantic-supplies.com 00966 54 020 6438 / 00966 56 982 9802




U117Soap Dispenser


| JOB #: |
|-----------|
| ITEM #: |
| QUANTITY: |

Revision 03/11

| MOUNTING | HANDING | TYPE | SIZE | OTHER |
|----------|---------|------|------|-------|
| | | | | |







SPECIFICATIONS

Dispenser: Fabricated of chrome plated brass.

Valve: Push in type valve is fabricated of chrome plated ABS material with a stainless steel return spring. Valve is located above soap level to assure a drip free operation. Available in liquid or lather style.

Globe: Clear, high impact, corrosion resistant container encased in highly polished stainless steel container with slotted sides to allow a constant fluid level check.

Mounting Plate: Theft resistant chrome plated steel wall plate.

Filler Cap: Theft resistant filler cap is equipped with special service key

and secured by means of a small chain.

Overall Size: 3 3/16"W x 6 1/2"H x 6 1/8"D

81mm x 165mm x 156mm Capacity: 12 fluid oz.

INSTALLATION

Provide an area on wall surface at desired or specified location. Hold mounting plate to surface making sure unit is level and transfer mounting points. Secure plate with proper fasteners per application. Two top screws will set dispenser in place on mounting plate. Secure bottom of dispenser to plate with supplied fastener. Remove service cap and fill dispenser with proper soap. Prime dispenser until soap flows freely.

*It is not recommended to mount any soap dispenser on mirrors

**For best performance, use pre-mixed low concentrate solutions. Dispensers should have periodic maintenance performed to insure life of dispenser. Rinse out globe and valve with warm water to prevent sludge buildup.

Preventative Maintenance: Each dispenser should be flushed out aprx, Every 30 days with warm water to prevent valve from; clogging with old soap, Abrasive cleaners should not be used when wiping down dispenser.

NOTES

Formerly Model #: U120L



UB14

Chrome Coat Hook & Bumper

| | JOB #: |
|--|-----------|
| | ITEM #: |
| | QUANTITY: |

Revision 11/14

| MOUNTING | HANDING | TYPE | SIZE | OTHER |
|----------|----------------|---------|------------|---------------------|
| | | | | |
| | | | | |
| | 1 5/8" 41mm | | | |
| | 7/8" 22mm | | | 3" 76mm 1/4" S 6mm |
| | 2 1/8 54m | 3" m | Rubber Tip | |
| | | | | |

SPECIFICATIONS INSTALLATION

UB Accessories: Fabricated of chrome plated, solid forged brass with a nickel and copper plating. In compliance with all standard commercial and government standards. Hard rubber bumper prevents damage to interior walls as well as door ways.

Overall Size: 1 5/8"W x 2 1/8"H x 3"D

41mm x 54mm x 76mm

Place hook on mounting surface and transfer mounting point locations. Drill pilot holes and secure with proper fasteners per application.

NOTES

1



UB16

Heavy Duty Chrome Coat Hook

| | JOB #: |
|--|-----------|
| | ITEM #: |
| | QUANTITY: |

Revision 03/11

| MOUNTING | HANDING | ТҮРЕ | SIZE | OTHER | |
|----------|---------------|------|-------------|-----------------|--------------|
| s | 3" 76 mm | s | 3" 76 mm | 3 1/4" 83 mm | |
| | SET SCREW (3) | | | | TENNON PLATE |

SPECIFICATIONS

UB Accessories: Fabricated of forged brass with a nickel and copper plating of chrome coating. In compliance with all standard commercial and government standards. Three (3) set screws will secure mounting flange to tenon plate providing a concealed mount.

Overall Size: 3"OD x 3"H x 3 1/4"D

76mm x 76mm x 83mm

INSTALLATION

Place tenon plate to wall surface and transfer mounting point locations. Drill pilot holes and secure tenon plate with proper fasteners per application. Place hook around tenon plate making sure hook is aligned properly. Secure flange to tenon plate with three (3) set screws.

NOTES




UC21 Soap Dish

JOB #:
ITEM #:

QUANTITY:

Revision 03/11

| MOUNTING | HANDING | TYPE | SIZE | OTHER |
|----------|---------|------|------|-------|
| | | | | |

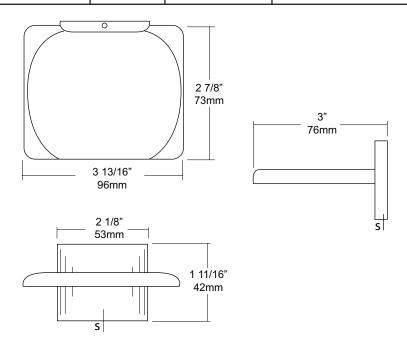

SPECIFICATIONS INSTALLATION

UC Accessories: All accessories are fabricated of high polished chrome plating over virgin zinc die cast. All UC items comply with standard federal specifications.

Overall Size: $3 \ 13/16$ W x $1 \ 11/16$ H x 3 D

97mm x 44mm x 76mm

Place concealed mounting bracket on wall surface at desired location. Transfer mounting points and drill pilot holes. Secure plate with proper fasteners per application. Place item over plate making sure it fits snugly and secure on the underside with supplied set screw.

NOTES



UC31 Series

Square Towel Bar

| JOB #: |
|-----------|
| ITEM #: |
| QUANTITY: |

Revision 06/11

| MOUNTING HANDING | TYPE SIZE | OTHER | |
|------------------|-------------------|-------|-----------------------|
| | L | | |
| 2 1/8" | 3/4 Square Tubing | | 3 1/8" 79mm S 1 |

UC Accessories: All accessories are fabricated of high polished chrome plating over virgin zinc die cast. All UC items comply with standard federal specifications.

Overall Size: 3 1/8" deep off wall 79mm

Bar: 3/4"OD

Standard lengths: 18", 24", 30"

Place posts on flat surface and connect each towel bar. Measure the center line distance from post to post. Transfer this dimension to desired location marked. Transfer mounting points and drill pilot holes. Secure plate with proper fasteners per application. Place post over plate making sure it fits snugly and secure on the underside with supplied set screw. Insert bar into post not mounted and place over plate making sure to insert bar into mounted post. Secure with set

| Ν | О. | Г | Ξ |
|---|----|---|---|
| | | | |



UC41Toilet Tissue Dispenser

JOB #:

ITEM #:

QUANTITY:

Revision 03/11

| MOUNTING | HANDING | TYPE | SIZE | OTHER |
|----------|---------|-----------------|----------------|----------------|
| | | 5 1/2" 140mm | | |
| | | | | |
| | | | 2 1/8" 54mm | 3 1/8" 79mm |
| | S | | | 13/16" 16mm |

SPECIFICATIONS

UC Accessories: All accessories are fabricated of high polished chrome plating over virgin zinc die cast. All UC items comply with standard federal specifications.

Rollers: White ABS rollers with heavy duty internal spring. Optional chrome plated roller available on request.

Optional U007 Theft Resistant Adapter: Prevents spindle from being removed until roll has been depleted.

Overall Size: 7 5/8"W x 1 13/16"H x 3 1/8"D (without roll)

195mm x 44mm x 79mm

Capacity: One standard roll with a 5 1/4" (133mm) OD

INSTALLATION

Place concealed mounting bracket on wall surface at desired location. Transfer mounting points and drill pilot holes. Secure plate with proper fasteners per application. Place item over plate making sure it fits snugly and secure on the underside with supplied set screw. Do this three times maintaining a 5 1/2" space centerline between posts. Make sure the post you select to be mounted as center post will accommodate two rolls and not the end post.

Toilet Paper Dispensers: All dispensers that are to meet ADA code cannot have any type of controlled delivery. (4.16)

NOTES