

date
projectname
attn
from
fax
email
phone

11/07/2018
DC West Elementary
Boyd Jones
Ruck Specialties





N102-2C Series

Markerboard, Particleboard Core,
Flat Trim, Box Tray, 2" Maprail,
Colored Cork

Job #:

Item #:

Quantity #:

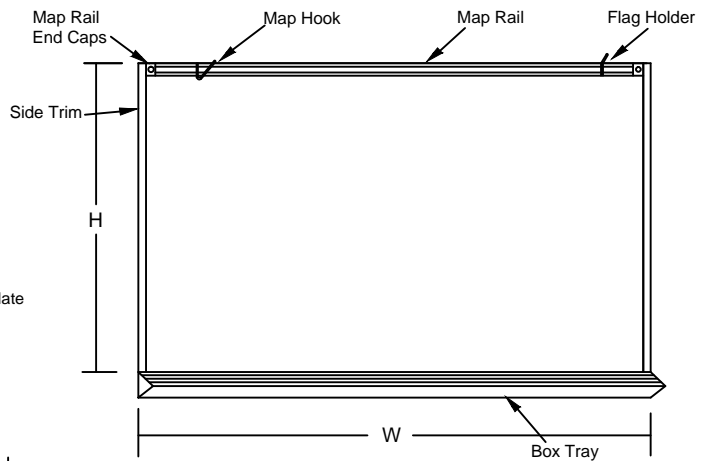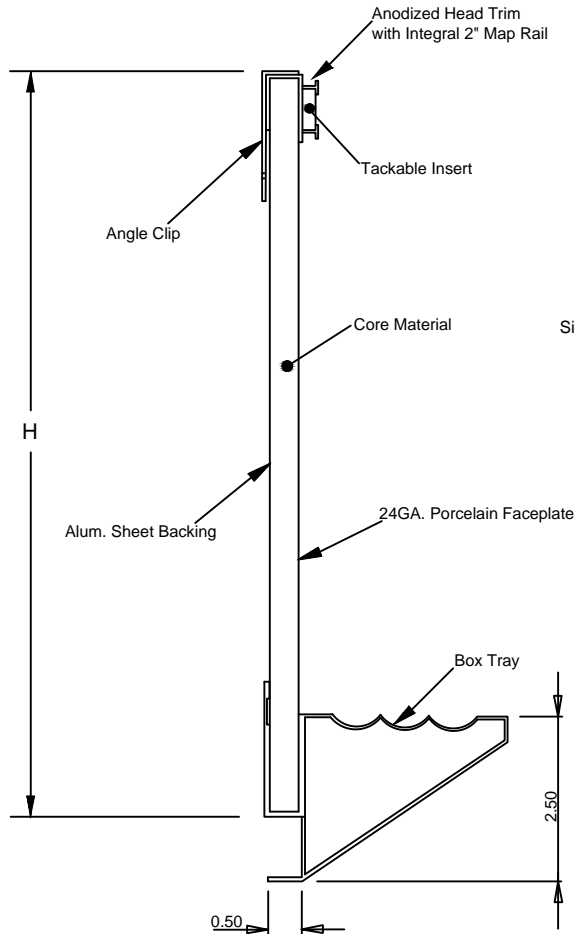

Standard Widths: 4', 6', 8', 10', 12', 14', 16'
Standard Height: 4'

Custom Dimensions available on request

All boards sized Height x Width

Drawing is for assembly description only.
Components are not to scale for clarity purposes.

Facesheet: 24 GA. Porcelain Enamelled Steel - Medium Gloss.

Core: 1/2" Particleboard.

Backsheet: Aluminum Foil.

Trim: 3/4" Flat Trim - Anodized Aluminum.

Tray: Box Tray - Anodized Aluminum.

Maprail: 2" - Anodized Aluminum.

Tackable Maprail Insert: 1/4" Colored Cork.

Accessories: (2) Map Hooks per 48" of Map Rail. (1) Flag holder per board.

• All aluminum extrusions have a minimum thickness of 0.062"




N10F-2C Series
 Markerboard, Particleboard Core,
 Flat Trim, No Tray, 2" Maprail,
 Colored Cork

Job #:

Item #:

Quantity #:

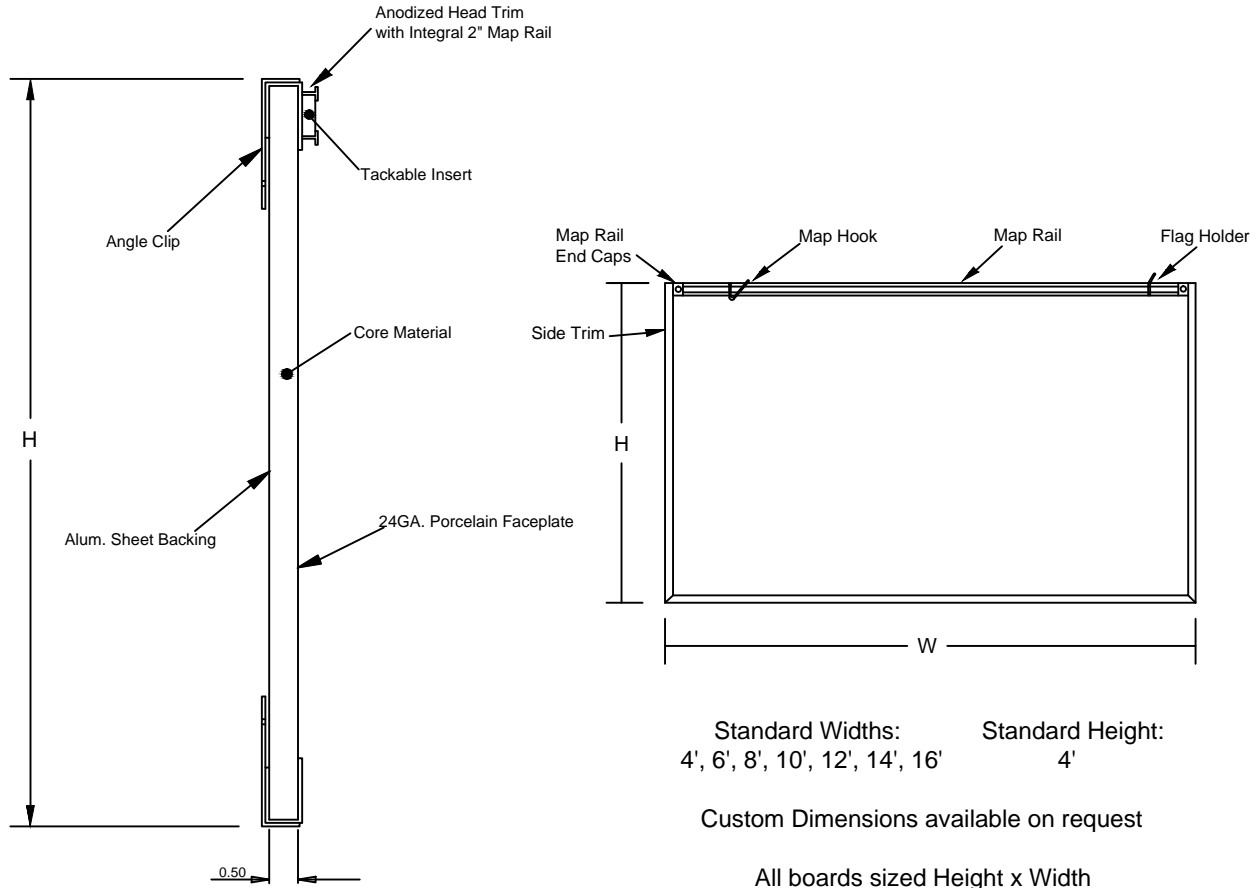

Standard Widths: 4', 6', 8', 10', 12', 14', 16'
 Standard Height: 4'

Custom Dimensions available on request

All boards sized Height x Width

Drawing is for assembly description only.
 Components are not to scale for clarity purposes.

Facesheet: 24 GA. Porcelain Enameled Steel - Medium Gloss.

Core: 1/2" Particleboard.

Backsheet: Aluminum Foil.

Trim: 3/4" Flat Trim - Anodized Aluminum.

Tray: None.

Maprail: 2" - Anodized Aluminum.

Tackable Maprail Insert: 1/4" Colored Cork.


Accessories: (2) Map Hooks per 48" of Map Rail. (1) Flag holder per board.

• All aluminum extrusions have a minimum thickness of 0.062"



N21F-0C Series
 Tackboard, Hardboard Core, Flat Trim,
 No Tray, No Maprail, Colored Cork

Job #:
Item #:
Quantity #:

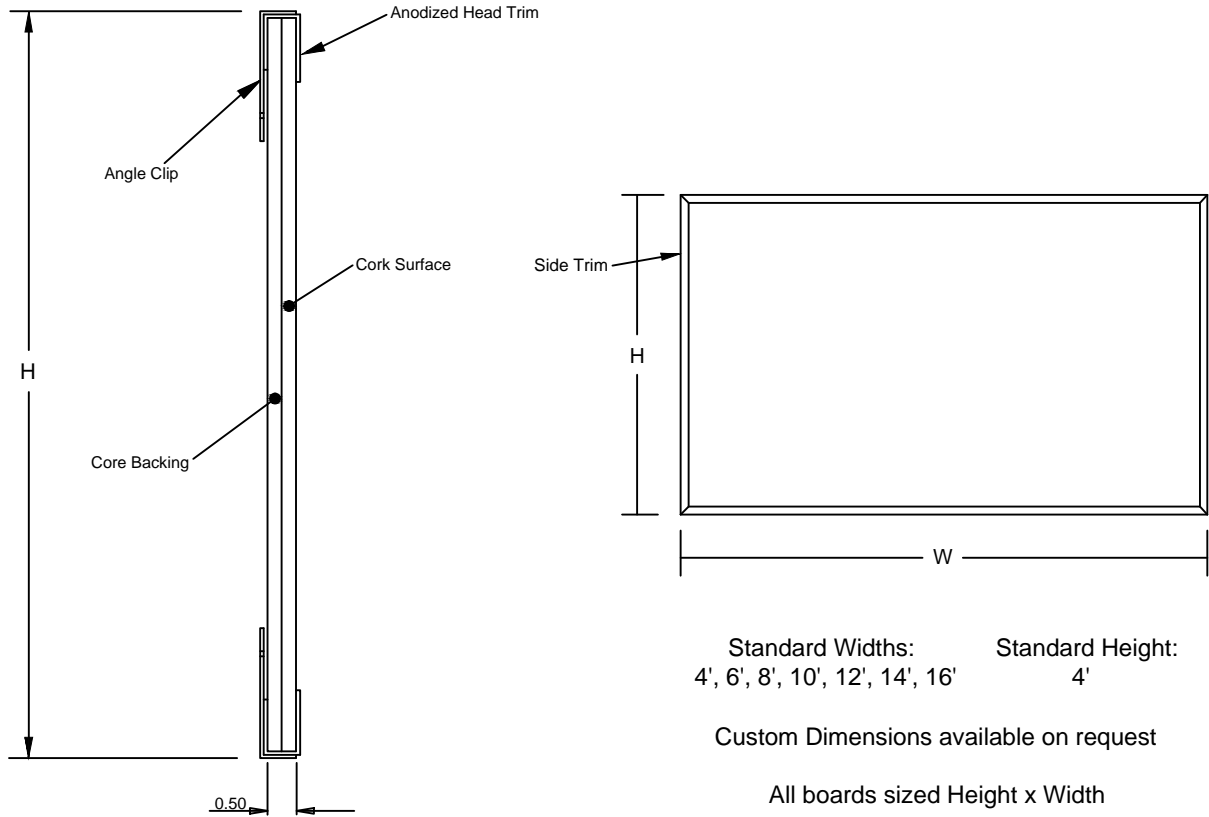

Drawing is for assembly description only.
 Components are not to scale for clarity purposes.

- Core Backing:** 1/4" Hardboard.
- Tackable Surface:** 1/4" Colored Cork.
- Trim:** 3/4" Flat Trim - Anodized Aluminum.
- Tray:** None.
- Maprail:** None.
- Tackable Maprail Insert:** N/A.

• All aluminum extrusions have a minimum thickness of 0.062"